

Aluminum Electrolytic Capacitors

YUSCON®

SS series


- The SS series is very small case size but possess the same high quality and performance as our standard size unit . They can replace more expensive dipped tantalum capacitors in most applications.
- Ultraminiature series with 5mm height.
- Rohs compliance.



SPECIFICATIONS

Item	Characteristics							
Operating Temperature Range	- 40 ~ +85 °C							
Voltage Range	4 ~50 V.DC							
Nominal Cap. Range	0.1 ~ 220 μF							
Capacitance Tolerance	- 20% ~ + 20% (at 20°C, 120Hz)							
Leakage Current	$I = 0.01CV$ or $3(\mu A)$ whichever is greater.(after 2 minutes) where, I: Max Leakage Current(μA), C: Nominal Capacitance(μF), V: Rated Voltage(V) (at 20 °C)							
Dissipation Factor ($\tan\delta$) (at 120Hz, +20 °C)	WV	4	6.3	10	16	25	35	50
	$\tan\delta$	0.35	0.24	0.20	0.16	0.14	0.12	0.10
Low Temp. Impedance Stability at 120Hz	W. V.	4	6.3	10	16	25	35	50
	$Z(-25°C) / Z(+20°C)$	7	4	3	2	2	2	2
	$Z(-40°C) / Z(+20°C)$	15	10	8	6	4	3	3
High Temp. Load Test	After 1000 hours, application of DC rated working voltage at 85 °C, the capacitor shall meet the following limits: Capacitance change ... $\leq \pm 20\%$ of the initial measured value(4V: $\pm 25\%$) $\tan\delta$... $\leq 150\%$ of the initial specified value(4V: 200%) DC leakage current ... \leq the initial specified value							
High Temp. Non-Load Test	After storage for 500 hours at 85 °C with no voltage applied, voltage treatment of JIS-C-5102 article 4-4 is to be given and then measurement shall be made, at which time requirements specified in the table "High temperature loading" can be met.							

DRAWING

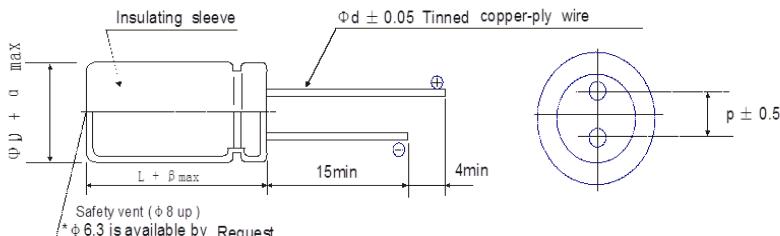

Unit:(mm)				
Φ D	4	5	6.3	8
P	1.5	2.0	2.5	3.5
Φ d		0.45		0.5
β			1.0	
α			0.5	

MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Freq.(Hz)	60(50)	120	1K	10K
Cap(μF)				
0.1~47	0.80	1.0	1.20	1.35
100~220	0.80	1.0	1.15	1.20

PART NUMBERING SYSTEM

Series	Rated Cap.	Cap. Tolerance	Rated Voltage	Case Size D	Case Size L
SS	□□□	□	□□□	□	□□

Aluminum Electrolytic Capacitors

YUSCON®

SS Series

WV(Vdc) \ Parameter	4	6.3	10	16	25	35	50							
Cap (μ F)	Φ DxL (mm)	Ripple current (mAmps)												
0.1											4X5	1		
(0.15)											4X5	4		
0.22											4X5	2		
0.33											4X5	3		
0.47											4X5	4		
											5X5	7		
(0.68)											4X5	9		
1.0											4X5	10		
(1.5)											4X5	16		
2.2										4X5	10	4X5	15	
3.3								4X5	13	4X5	16	4X5	18	
							4X5	14	4X5	14	4X5	17	5X5	18
4.7							4X5	14	4X5	14	5X5	19	5X5	23
(6.8)				4X5	19	4X5	26	4X5	28	5X5	34	6.3X5	40	
10		4X5	18	4X5	17	4X5	22	5X5	26	5X5	28	5X5	35	
											6.3X5	38		
15		4X5	31	4X5	34	5X5	44	5X5	49	6.3X5	59			
22	4X5	20	4X5	26	5X5	31	5X5	38	6.3X5	48	6.3X5	50		
33	4X5	24	4X5 5X5	35 35	5X5	43	5X5 6.3X5	47 55	6.3X5	60				
47	4X5	38	4X5	42	5X5 6.3X5	51 58	5X5 6.3X5	60 74						
(68)	5X5	64	6.3X5	70	6.3X5	97	8X5	85						
100	5X5	48	6.3X5	72	6.3X5	76	8X5	100						
220	6.3X5	56	8X5	115	8X5	124								

→ Rated Ripple Current (mAmps) at 85°C 120Hz

→ Case Size: Φ DxL(mm)